



osnovne informacije

- Pneumatski cilindri MA serije, proizvedeni su u skladu sa standardom ISO 6432.
- Na raspolaganju su prečnici od 12 do 40 mm.
- Hodovi cilindara su u rasponu od 10 do 350 mm.
- Cilindri su sa magnetnim klipom, što omogućava jednostavnu primenu bezkontaktnih krajnjih prekidača
- Max radni pritisak 10 bar

označavanje

MA 6432 - 25 x 50 - S

prečnik cilindra —


hod _____

bez magnetna u klipom —
 sa magnetom u klipom **S** | _____

Preporučeni hodovi

cilindar	hod											
	10	25	40	50	80	100	125	160	200	250	300	320
Ø 12	●	●	●	●	●	●						
Ø 16	●	●	●	●	●	●	●					
Ø 20	●	●	●	●	●	●	●	●	●	●		
Ø 25	●	●	●	●	●	●	●	●	●	●	●	●
Ø 32	●	●	●	●	●	●	●	●	●	●	●	●
Ø 40		●	●	●	●	●	●	●	●	●	●	

crtež

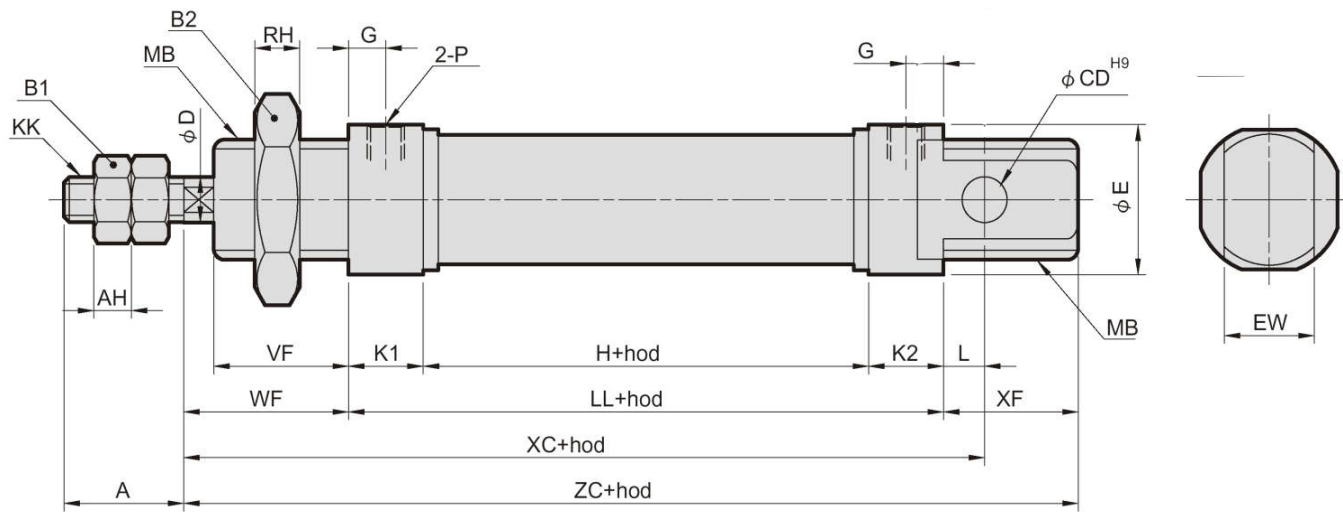

dimenzije

CILINDAR	A	AH	B1	B2	CD	D	EW	G	H	KK	K1 K2	L	LL	MB	P	RH	XF	WF	XC	ZC
Ø 12	16	5	10	24	6	6	12	6	28	M6x1	11	3	50	M16x1.5	M5x0.8	8	17	22	75	89
Ø 16	16	5	10	22	6	6	12	5	34.5	M6x1	10	5.5	54.5	M16x1.5	M5x0.8	6	18	22	82	95.4
Ø 20	20	5	13	30	8	8	16	8	38	M8x1.25	15	3	68	M22x1.5	G1/8	6	20	24	95	112
Ø 25	22	5	17	30	8	10	16	7.5	37	M10x1.25	15	9	67	M22x1.5	G1/8	6	22	28	104	117
Ø 32	30	6	17	32	10	12	16	8	44	M10x1.25	16	15	76	M22x2	G1/8	8	27	22	113	125
Ø 40	32	7	17	41	12	16	20	8	44	M12x1.25	16	15	76	M30x2	G1/8	9	27	22	113	125