

# Hand-Draw Valve



## Ordering code

**4R**

### Specification

4R: 5/2 way hand-draw valve

3R: 3/2 way hand-draw valve

**2**

### Series

200 Series

300 Series

**10**

### Number of places

10: Single-head double-position

-

**06**

### Port size

06: G1/8"

08: G1/4"


10: G3/8"

## Specifications

Model	4R210-06	4R210-08	3R210-06	3R210-08	4R310-08	4R310-10	3R310-08	3R310-10
Fluid	40 micron filtered air							
Position and way NO.	5/2 way		3/2 way		5/2 way		3/2 way	
Effective area	14mm <sup>2</sup> (CV=0.78)	16mm <sup>2</sup> (CV=0.89)	14mm <sup>2</sup> (CV=0.78)	16mm <sup>2</sup> (CV=0.89)	25mm <sup>2</sup> (CV=1.40)	30mm <sup>2</sup> (CV=1.68)	25mm <sup>2</sup> (CV=1.40)	30mm <sup>2</sup> (CV=1.68)
Port size	Air inlet=Air outlet =Exhaust=G1/8"	Air inlet=Air outlet =G1/4" Exhaust=G1/8"	Air inlet=Air outlet =Exhaust=G1/8"	Air inlet=Air outlet =Exhaust=G1/4"	Air inlet=Air outlet =Exhaust=G1/4"	Air inlet=Air outlet =G3/8" Exhaust=G1/4"	Air inlet=Air outlet =Exhaust=G1/4"	Air inlet=Air outlet =Exhaust=G3/8"
Operating pressure	0~0.8MPa							
Operating temperature	0~60℃							

## Dimensions

**4R210-08**

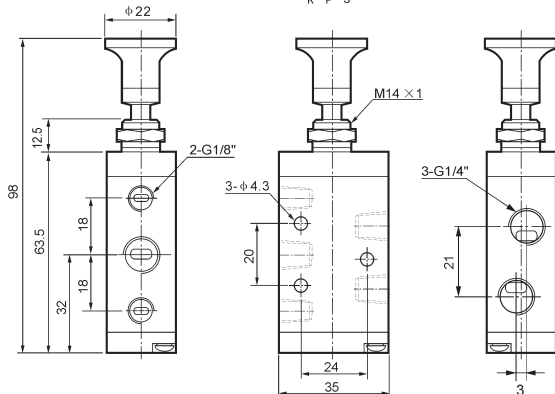

**3R210-08**

